




TORMAX 1201 SWING DOOR OPERATOR


SIMULTANEOUS PAIR, VISIBLE INSWING
BUTT HUNG AND OFFSET APPLICATION

JOB NAME: _____ DATE: _____


DOOR LOCATION: _____ DOOR NO: _____ SHEET _____ OF _____

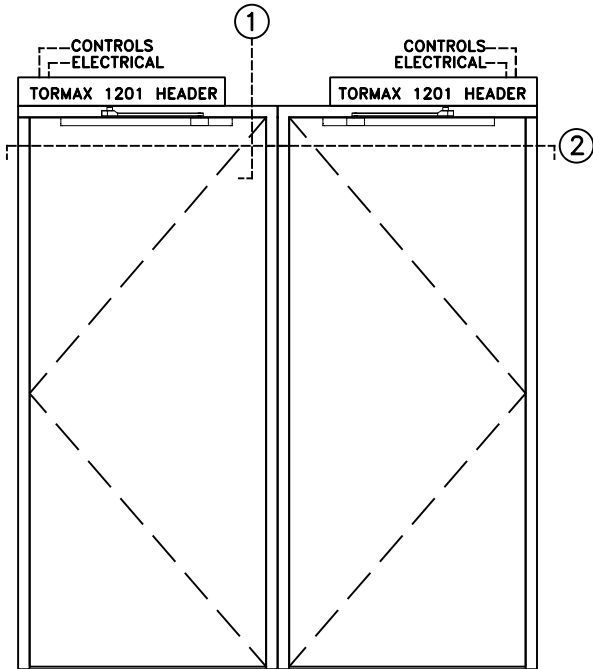


ELEVATION

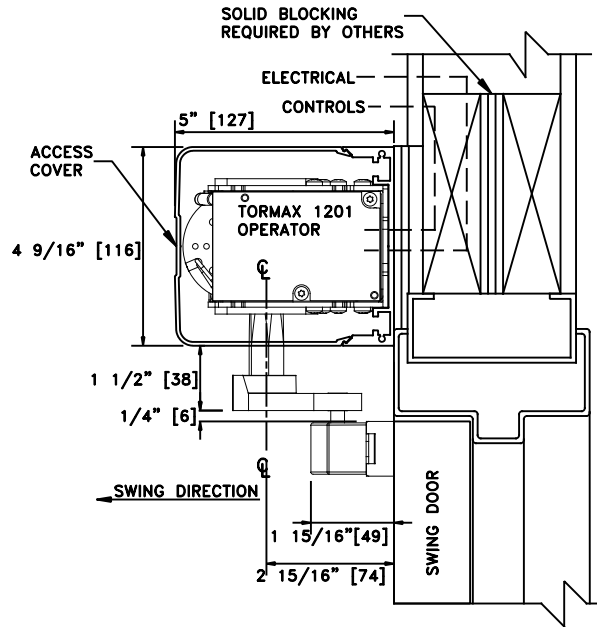

1 VERTICAL SECTION

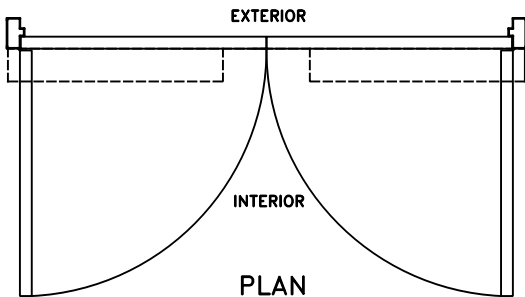

PLAN

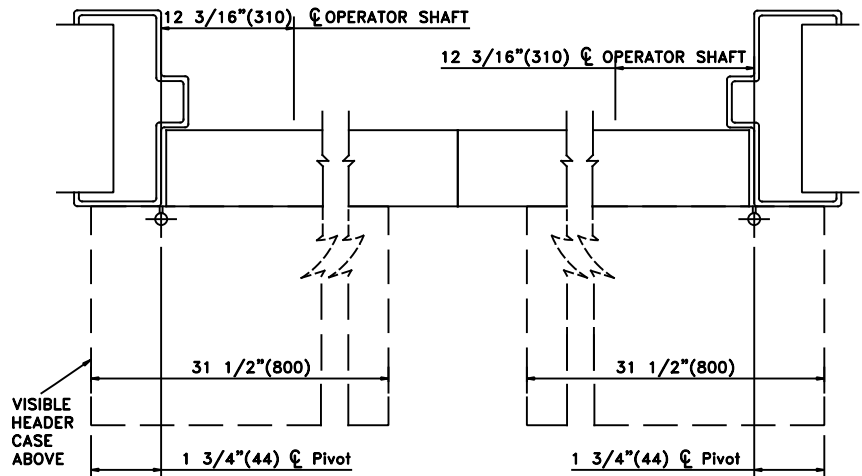

2 HORIZONTAL SECTION

NOTES:

1. DETAILS NOT TO SCALE.
2. ELECTRICAL REQUIREMENTS:
120VAC, 5AMPS MIN. TO OPERATOR BY ELECTRICAL CONTRACTOR.
3. DOORS, FRAMES AND HARDWARE BY OTHERS.
4. 32" CLEAR DOOR OPENING REQUIRED TO MEET A.D.A. REQUIREMENTS.
5. DOORS MUST BE NON-LATCHED FOR PROPER OPERATION.
6. OPERATOR HEADER IS AVAILABLE FOR FULL WIDTH DOOR APPLICATIONS.
7. OPERATOR CAN BE CONFIGURED TO MEET ANSI STANDARDS A156.10 & ANSI A156.19