


JOB NAME: _____ DATE: _____
DOOR LOCATION: _____ DOOR NO: _____ SHEET ____ OF ____

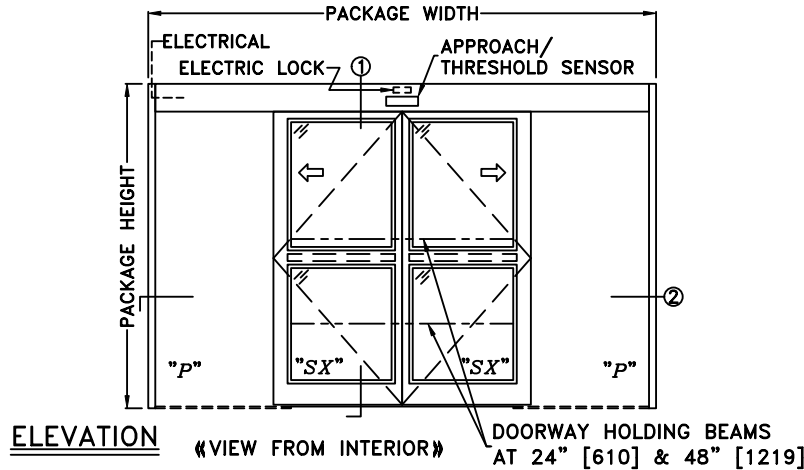


ELEVATION


«VIEW FROM INTERIOR»

DOORWAY HOLDING BEAMS
AT 24" [610] & 48" [1219]

EMERGENCY BREAKOUT "SX"
PANELS IN CLOSED POSITION ONLY

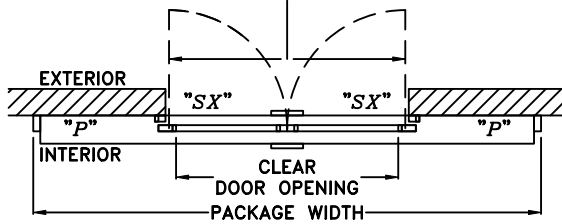


PLAN

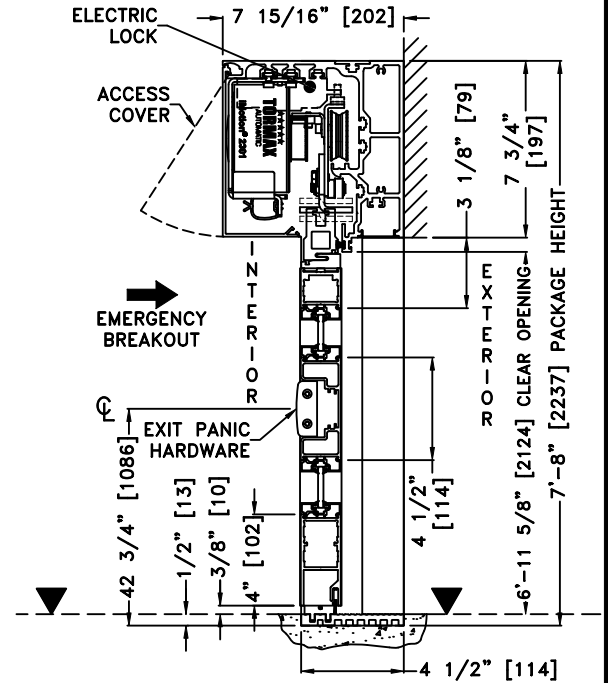

1 VERTICAL SECTION

▼ = FINISHED FLOOR

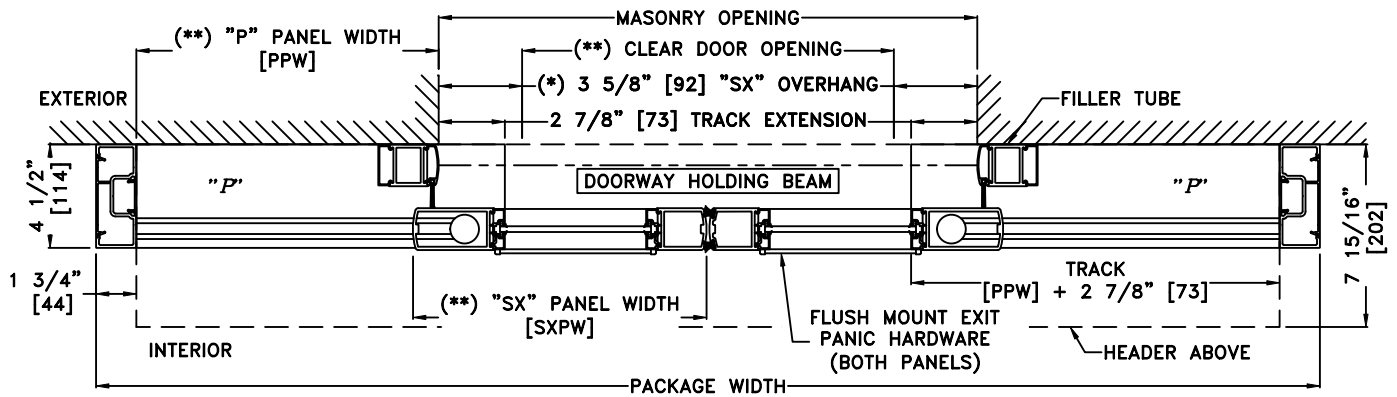

2 HORIZONTAL SECTION

*SEE APPENDIX FOR DETAILS OF TX9200 HEAVY DUTY DRIVE SYSTEM, THRESHOLD OPTIONS, & SURFACE MOUNT CONCEALED VERTICAL ROD EXIT PANIC HARDWARE OPTION

NOTES:

1. DETAILS NOT TO SCALE
2. ELECTRICAL REQUIREMENTS:
120 VAC, 5 AMPS MIN. TO OPERATOR BY ELECTRICAL CONTRACTOR
3. DOOR PACKAGES ARE INDIVIDUALLY ENGINEERED TO FIT YOUR JOB REQUIREMENTS

SAMPLE PACKAGE WIDTH INFORMATION

PACKAGE WIDTH [UW] (*)	CLEAR DOOR OPENING [CDO] (*)	PANEL WIDTH [PW] (*)	EMERGENCY BREAKOUT WIDTH (*)
$2*[CDO] + 13 \frac{3}{4}$	$[UW] \frac{1}{2} - 6 \frac{7}{8}$ -OR- $2*[PW] - 6 \frac{1}{8}$	$[UW] \frac{1}{4} - \frac{3}{8}$	$[UW] - 2*[PW] - 7 \frac{1}{2}$
10'-0" [3048]	53 1/8" [1349]	29 5/8" [752]	53 1/4" [1353]
12'-0" [3658]	65 1/8" [1654]	35 5/8" [905]	65 1/4" [1657]
14'-0" [4267]	77 1/8" [1959]	41 5/8" [1057]	77 1/4" [1962]

(*) CALCULATIONS BASED ON EQUAL PANELS, 2 1/8" NARROW STILES, & 1/4" GLASS
(**) TO OPEN SX PANEL FLUSH WITH EDGE OF MO, USE THE FOLLOWING FORMULAS:

$$[SXPW] = [MO] \frac{1}{2} + 1 \frac{1}{6} \mid [PPW] = [MO] \frac{1}{2} + 3 \frac{5}{16} \mid [UW] = 2*[MO] + 10 \frac{1}{8}$$