

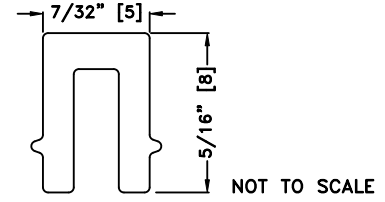
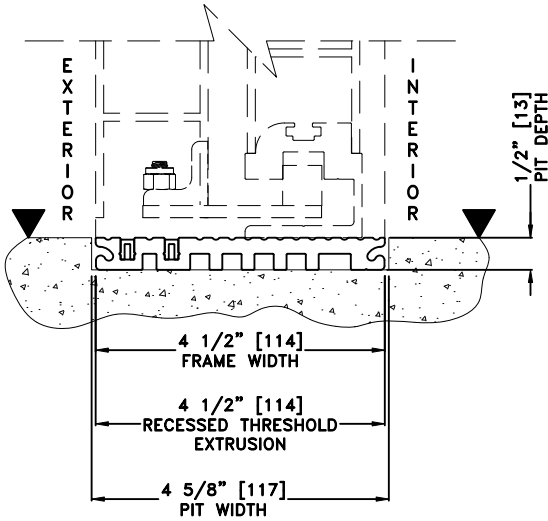
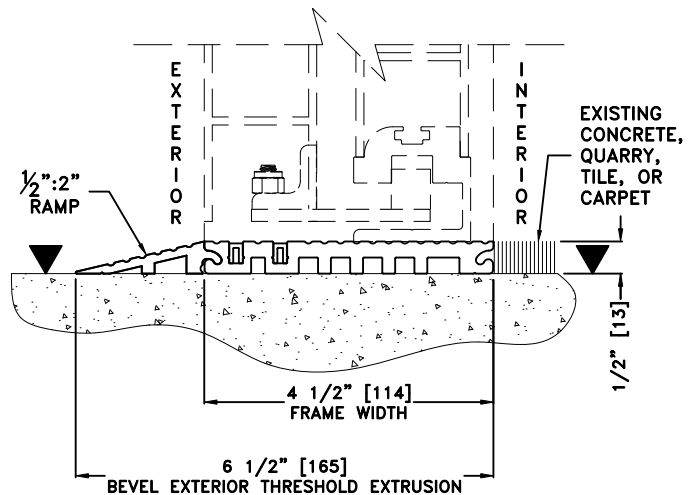


JOB NAME: \_\_\_\_\_ DATE: \_\_\_\_\_

DOOR LOCATION: \_\_\_\_\_ DOOR NO: \_\_\_\_\_ SHEET \_\_\_\_ OF \_\_\_\_

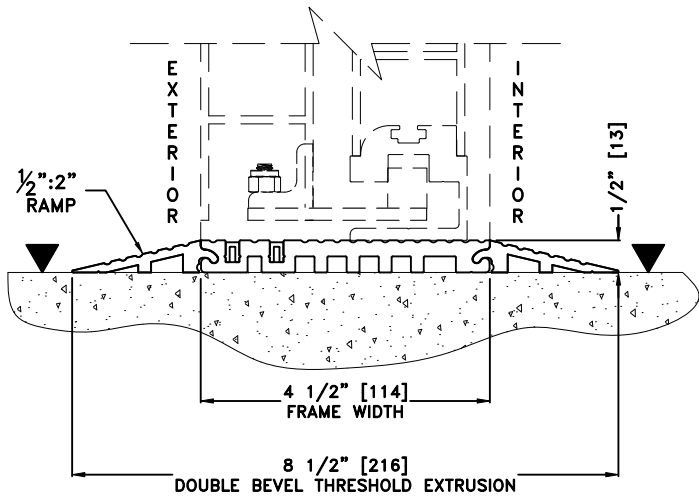

THRESHOLD TRACK GROOVE FILLER STRIP –  
 RUNS FULL WIDTH ON ALL THRESHOLDS

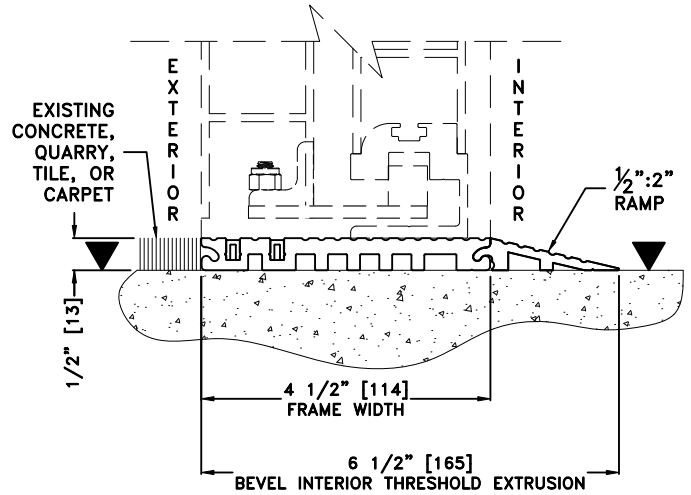

NOTES:  
 THRESHOLDS ARE NOT REQUIRED FOR THE TX9200SL SERIES. THE FOLLOWING THRESHOLD OPTIONS REPRESENT TYPICAL CONFIGURATIONS. DUE TO VARRRYING FLOOR CONDITIONS ADDITIONAL CONFIGURATIONS ARE ILLUSTRATED IN APPENDIX (2.5.C). THRESHOLDS ARE CONTINUOUS AND EXTEND FROM INSIDE JAMB TO INSIDE JAMB. DOORS AND SIDELITES ARE UNDERCUT 1/2" [13] TO ACCOMODATE PROFILE HEIGHT OF THRESHOLD.

▼ = FINISHED FLOOR