


JOB NAME: _____ DATE: _____

DOOR LOCATION: _____ DOOR NO: _____ SHEET ___ OF ___


ROUND STAINLESS STEEL SWITCHES—HARDWIRED




WALL SWITCH
 STAINLESS STEEL
 4 1/2" DIAMETER
 (PLAIN)



WALL SWITCH
 STAINLESS STEEL
 4 1/2" DIAMETER
 ENGRAVED LOGO
 PRESS TO OPEN
 (HCPTO)




WALL SWITCH
 STAINLESS STEEL
 4 1/2" DIAMETER
 ENGRAVED
 PRESS TO OPEN
 (PTO)



WALL SWITCH
 STAINLESS STEEL
 4 1/2" DIAMETER
 ENGRAVED LOGO
 (HC)


INSTALLATION CRITERIA

- ANSI 156.10: MIN 15", MAX 48"
 ANSI 156.19: MIN 34", MAX 48"
- INSTALLATION DISTANCE – 12'-0" MAX. FROM CENTER OF DOOR
 Exception: for each additional foot over 12' max requires an additional 1 second per foot above the 5 second minimum.
 (e.g. for 15', add 3 seconds to the required 5 for a total of 8 seconds of hold time.)
- INSTALLED WITHIN VIEW OF AUTOMATIC DOOR

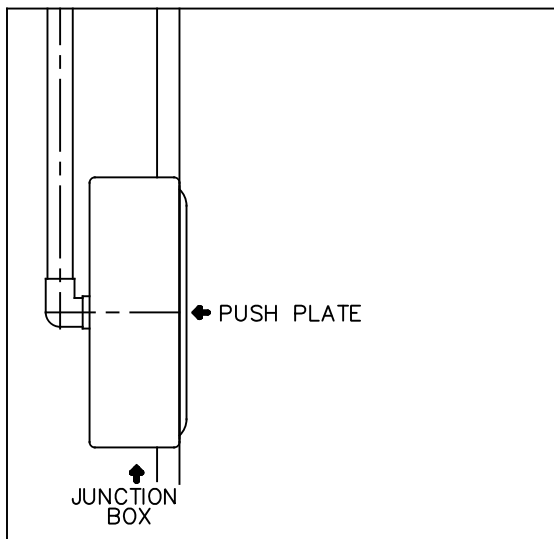

HARDWIRE

1. (2) #18 LOW VOLTAGE WIRES (OR PER LOCAL CODE) REQUIRED FROM OPERATOR TO EACH PUSH PLATE BY ELECTRICAL CONTRACTOR.
2. STANDARD JUNCTION BOX BY ELECTRICAL CONTRACTOR.

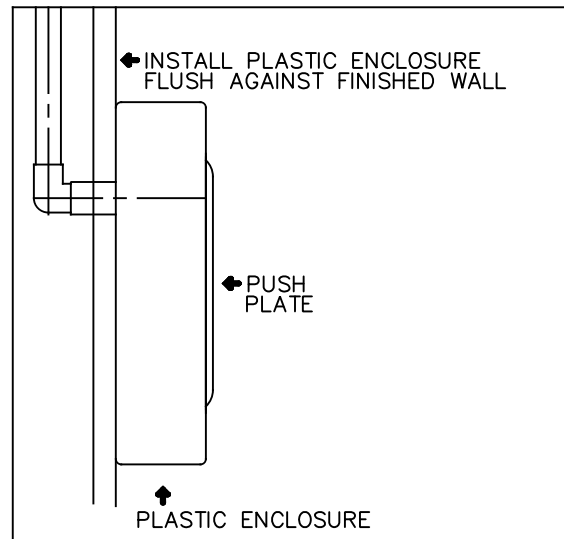

HARDWIRE—SURFACE MOUNTED

1. PRESS SWITCH IS MOUNTED TO A SQUARE SURFACE BOX (5" x 5" x 1 3/4" DEEP).