


JOB NAME: _____ DATE: _____

DOOR LOCATION: _____ DOOR NO: _____ SHEET ___ OF ___


ROUND STAINLESS STEEL SWITCHES—RADIO CONTROLLED 433 MHz




WALL SWITCH
 STAINLESS STEEL
 4 1/2" DIAMETER
 (PLAIN)



WALL SWITCH
 STAINLESS STEEL
 4 1/2" DIAMETER
 ENGRAVED LOGO
 PRESS TO OPEN
 (HCPTO)




WALL SWITCH
 STAINLESS STEEL
 4 1/2" DIAMETER
 ENGRAVED
 PRESS TO OPEN
 (PTO)



WALL SWITCH
 STAINLESS STEEL
 4 1/2" DIAMETER
 ENGRAVED LOGO
 (HC)

INSTALLATION CRITERIA

- ANSI 156.10: MIN 15", MAX 48"
 ANSI 156.19: MIN 34", MAX 48"
- INSTALLATION DISTANCE — 12'-0" MAX. FROM CENTER OF DOOR
 Exception: for each additional foot over 12' max requires an additional 1 second per foot above the 5 second minimum.
 (e.g. for 15', add 3 seconds to the required 5 for a total of 8 seconds of hold time.)
- INSTALLED WITHIN VIEW OF AUTOMATIC DOOR

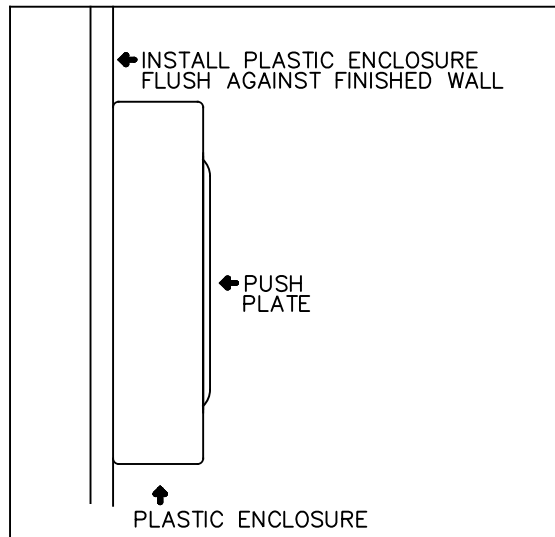

WIRELESS RADIO CONTROLLED—SURFACE MOUNTED

1. PRESS SWITCH IS MOUNTED TO A SQUARE SURFACE BOX (5" x 5" x 1 3/4" DEEP).