


JOB NAME: _____ DATE: _____
 DOOR LOCATION: _____ DOOR NO: _____ SHEET ___ OF ___

FRAME MOUNTED STAINLESS STEEL SWITCHES— RADIO CONTROLLED 433 MHz

INSTALLATION CRITERIA

- ANSI 156.10: MIN 15", MAX 48"
 ANSI 156.19: MIN 34", MAX 48"
- INSTALLATION DISTANCE – 12'–0" MAX. FROM CENTER OF DOOR
 Exception: for each additional foot over 12' max requires an additional 1 second per foot above the 5 second minimum.
 (e.g. for 15', add 3 seconds to the required 5 for a total of 8 seconds of hold time.)
- INSTALLED WITHIN VIEW OF AUTOMATIC DOOR



DELUXE FRAME SWITCH
 STAINLESS STEEL
 1 3/4" x 4 1/2"
 (PLAIN)




DELUXE FRAME SWITCH
 STAINLESS STEEL
 1 3/4" x 4 1/2"
 W/HANDICAP LOGO
 (ENGRAVED)

(HC)



DELUXE FRAME SWITCH
 STAINLESS STEEL
 1 3/4" x 4 1/2"
 PUSH TO OPEN
 W/HANDICAP LOGO
 (ENGRAVED)

(HC PTO)




DELUXE FRAME SWITCH
 STAINLESS STEEL
 1 3/4" x 4 1/2"
 PUSH TO OPEN
 (ENGRAVED)

(PTO)

FRAME SWITCH DETAILS

◆ INSTALL PLASTIC ENCLOSURE
 FLUSH AGAINST FINISHED WALL




◆ PUSH
 PLATE

↑
 PLASTIC ENCLOSURE

WIRELESS – RADIO CONTROLLED SURFACE MOUNTED

1. PRESS SWITCH IS MOUNTED TO A SQUARE SURFACE BOX (4 3/4" x 2" x 1 3/4" DEEP).

ASSY ISOMETRIC VIEW

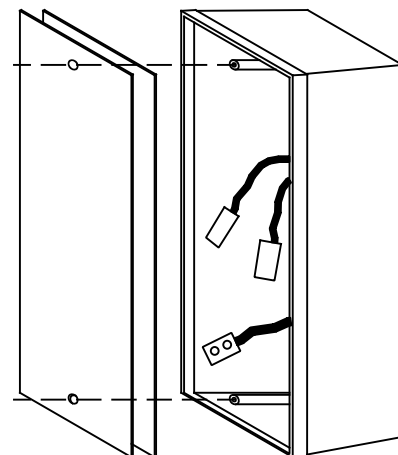

UNIVERSAL WALL BOX WITH TRANSMITTER
 (4 3/4" x 2" x 1 3/4" DEEP)