

JOB NAME: _____ DATE: _____

DOOR LOCATION: _____ DOOR NO: _____ SHEET ___ OF ___

CLEANSKAN – TOUCHLESS WALL SWITCH
 SINGLE GANG SWITCH

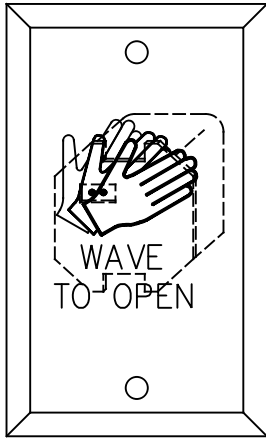


PLATE SIZE
 2 3/4"W x 4 9/16"H x 17/8"D
 FOR USE WITH
 CONVENTIONAL
 SINGLE GANG BOXES
 SURFACE OR RECESS
 MOUNT
 DETECTION RANGE 4"–24"
 ADJUSTABLE

 AVAILABLE COLORS:
 BLACK, CREAM, WHITE

CLEANSKAN – TOUCHLESS WALL SWITCH
 DOUBLE GANG SWITCH



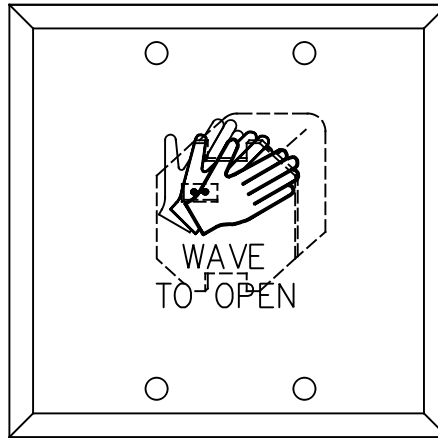


PLATE SIZE
 4 5/8"W x 4 5/8"H x 1 7/8"D
 FOR USE WITH
 CONVENTIONAL
 DOUBLE GANG BOXES
 SURFACE OR RECESS
 MOUNT
 DETECTION RANGE 4"–24"
 ADJUSTABLE

 AVAILABLE COLORS:
 BLACK, CREAM, WHITE

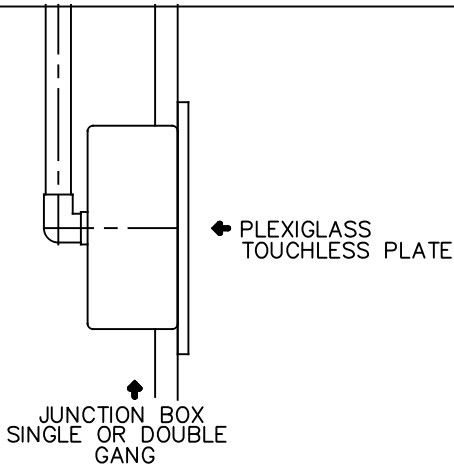

HARDWIRE – RECESS MOUNT

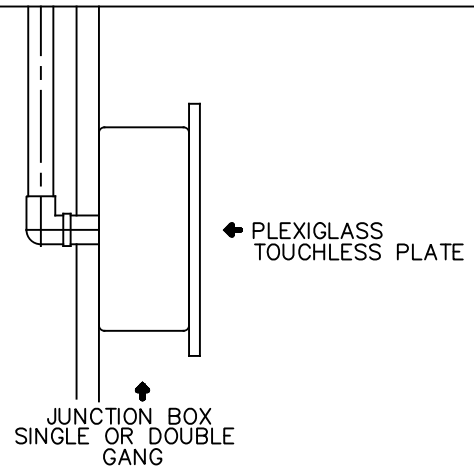

HARDWIRE – SURFACE MOUNT

1. (4) #18 LOW VOLTAGE WIRES (OR PER LOCAL CODE)
 REQUESTED FROM OPERATION TO EACH TOUCHLESS
 PUSH PLATE BY ELECTRICAL CONTRACTOR.

2. JUNCTION BOX
 BY ELECTRICAL
 CONTRACTOR.

12 or 24V AC/DC(-)	○	1	BLACK
12 or 24V AC/DC(+)	○	2	RED
N/C	○	3	BLANK
N/O	○	4	GREEN
COMMON	○	5	WHITE

INSTALLATION CRITERIA

- ANSI 156.10: MIN 15", MAX 48"
 ANSI 156.19: MIN 34", MAX 48"
- INSTALLATION DISTANCE – 12'–0"
 MAX. FROM CENTER OF DOOR
 Exception: for each additional foot
 over 12' max requires an additional
 1 second per foot above the 5
 second minimum.
 (e.g. for 15', add 3 seconds to the
 required 5 for a total of 8 seconds
 of hold time.)
- INSTALLED WITHIN VIEW OF
 AUTOMATIC DOOR